


Rittal – The System.

Faster – better – everywhere.

► Rittal Enclosure Heaters

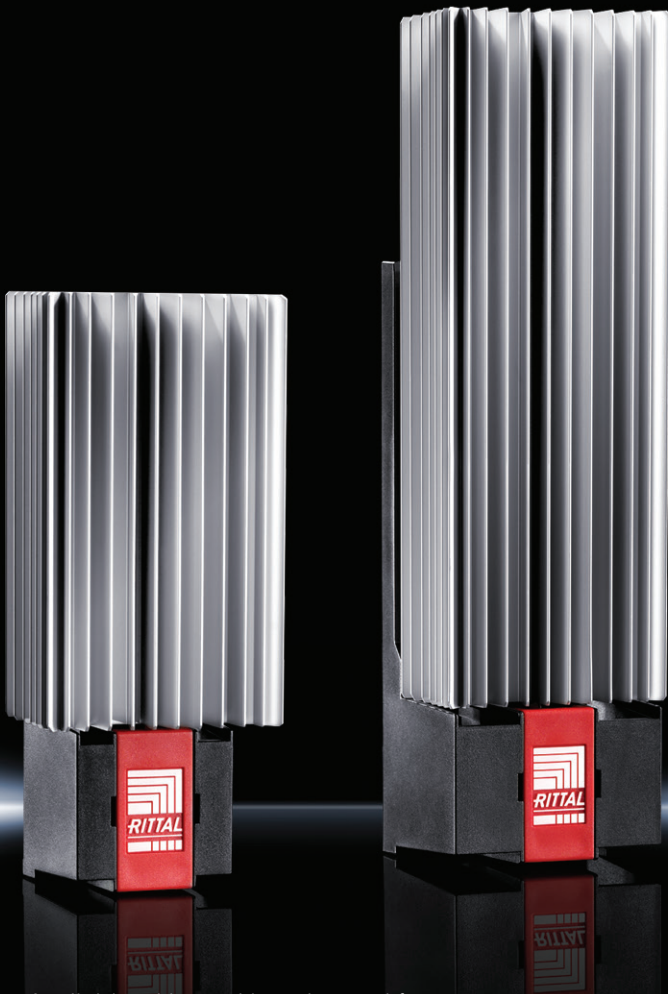

Condensation represents a serious risk for control electronics, both in outdoor and indoor locations. Rittal's enclosure heaters are designed to regulate the internal conditions of an enclosure. Advanced **Positive Temperature Coefficient (PTC)** technology allows the heater to self-regulate its operation – only using energy when required. The energy-efficient PTC technology and design optimization maximizes the latest in computational fluid dynamics (CFD) to permit improved heating outputs. New features like double quick-connection terminals and a quick-assembly system save time and unnecessary costs.

Without fans there's continual thermal output of 10 to 150 watts available in 7 units from the smallest 8-10W heater to the largest 130-150W model. Various output ratings ensure that the correct thermal output is always available. Heaters with built-in fans are capable of generating thermal output of 250W, 400W and 800W from three models. For precise temperature control, all the units can be fitted with an optional thermostat, temperature indicator/controller and a hygrostat to monitor humidity levels.

- Available with or without internal fans
- Optional thermostat, temperature indicator/controller and hygrostat available on all models
- Quick-connection terminals
- New quick-assembly designs
- Thermal capacities from 10 to 150 watts in seven models without fans

- Three models with built-in fans generate 250W, 400W or 800W thermal capacity
- Models without fans operate at 110-240 volts – 50/60 Hz
- Models with fans operate at 110/230 volts – 50/60 Hz
- Special voltage are available

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE

SOFTWARE & SERVICES



FRIEDHELM LOH GROUP

www.rittal.ca

Enclosure Heaters without fan

Supply includes:

- PTC heater
- Quick connection terminal
- Assembly components

Note:

- For precise temperature control inside the enclosure, we recommend using the enclosure internal thermostat or the digital enclosure internal temperature display and thermostat.


- The installation of heaters is generally advisable in order to prevent condensation.
- In order to prevent condensation on the components, the Hygrostat is recommended to regulate heating.
- In larger enclosures, even heat distribution is best achieved by installing several low-output heaters

Approvals:

- UR
- cUR
- CSA

Technical Details:

Available on the internet



Continuous thermal output 34 – 512 BTU (10 – 150 W), without fan

Model Number	3105.310	3105.320	3105.330	3105.340	3105.350	3105.360	3105.370
Height (H) inches (mm)	5 (120)	5 (120)	6 (155)	6 (155)	9 (230)	6 (165)	7 (180)
Width (B) inches (mm)	2 (45)	2 (45)	3 (64)	3 (64)	3 (64)	4 (90)	4 (90)
Depth (T) inches (mm)	2 (46)	2 (46)	2 (56)	2 (56)	2 (56)	3 (75)	3 (75)
Continuous thermal output at T _u = 50 F° BTU (W)	27 – 34 (8 – 10)	61 – 68 (18 – 20)	78 – 102 (23 – 30)	167 – 171 (49 – 50)	215 – 256 (63 – 75)	293 – 341 (86 – 100)	444 – 512 (130 – 150)
Rated operating voltage V, ~, Hz	110 -240, 1 ~, 50/60	110 -240, 1 ~, 50/60	110 -240, 1 ~, 50/60	110 -240, 1 ~, 50/60	110 -240, 1 ~, 50/60	110 -240, 1 ~, 50/60	110 -240, 1 ~, 50/60
Pre-fuse A	2	2	4	4	4	4	4

Accessories

Enclosure Internal Thermostat (1 piece per pack)	3110.000	3110.000	3110.000	3110.000	3110.000	3110.000	3110.000
Hygrostat (1 piece per pack)	3118.000	3118.000	3118.000	3118.000	3118.000	3118.000	3118.000
Digital Enclosure Internal Temperature Display and Thermostat (1 piece per pack)	3114.200	3114.200	3114.200	3114.200	3114.200	3114.200	3114.200
Bottom-Mounted Adapter (1 piece per pack)	3110.200	3110.200	3110.200	3110.200	3110.200	3110.200	3110.200

Enclosure Heaters with fan

Supply includes:

- PTC heater
- Fan
- Quick connection terminal
- Assembly components

Note:

- For precise temperature control inside the enclosure, we recommend using the enclosure internal thermostat or the digital enclosure internal temperature display and thermostat.


- The installation of heaters is generally advisable in order to prevent condensation.
- In order to prevent condensation on the components, the Hygrostat is recommended to regulate heating.
- In larger enclosures, even heat distribution is best achieved by installing several low-output heaters

Approvals:

- UR
- cUR
- CSA

Technical Details:

Available on the internet



Continuous thermal output 802 – 2730 BTU (235 – 800 W), with fan

Model Number	3105.410	3105.380	3105.420	3105.390	3105.430	3105.4000
Height (H) inches (mm)	8 (200)	8 (200)	8 (200)	8 (200)	8 (200)	8 (200)
Width (B) inches (mm)	4 (103)	4 (103)	4 (103)	4 (103)	4 (103)	4 (103)
Depth (T) inches (mm)	4 (103)	4 (103)	4 (103)	4 (103)	4 (103)	4 (103)
Continuous thermal output at T _u = 50 F° BTU (W)	802/853 (235/250)	853/904 (250/265)	1211/1365 (355/400)	1355/1416 (400/415)	2423/2730 (710/800)	2730/2969 (800/870)
Rated operating voltage V, ~, Hz	115, 1~, 50/60	230, 1~, 50/60	115, 1~, 50/60	230, 1~, 50/60	115, 1~, 50/60	230, 1~, 50/60
Pre-fuse A	4	4	6	6	10	6

Accessories

Enclosure Internal Thermostat	3110.000	3110.000	3110.000	3110.000	3110.000	3110.000
Hygrostat	3118.000	3118.000	3118.000	3118.000	3118.000	3118.000
Digital Enclosure Internal Temperature Display and Thermostat	3114.200	3114.200	3114.200	3114.200	3114.200	3114.200
Bottom-Mounted Adapter	3110.200	3110.200	3110.200	3110.200	3110.200	3110.200

Note: Imperial measurements are approximate, metric measurements are exact.

Rittal Systems Ltd.

6485 Ordan Drive • Mississauga, ON - L5T 1X2 • Toll-free: 800-399-0748
 • Email: marketing@rittal.ca • www.rittal.ca